



# WiFi connection bug fix V0.1

Connect mag-board to USB port, and run **Flash\_download\_tool**


Select ESP32

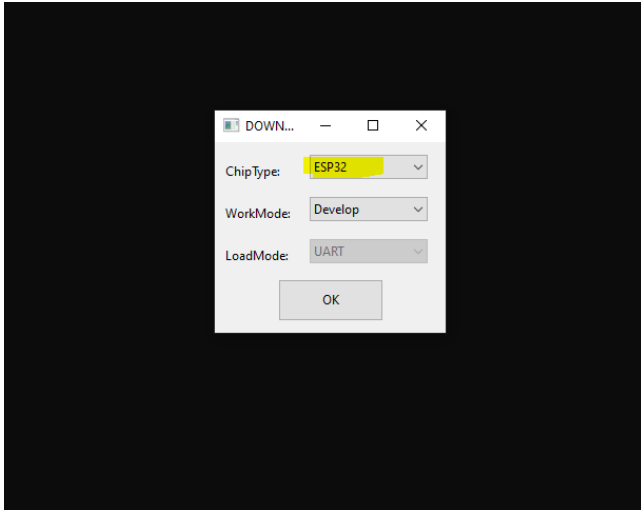


Then open and select **factory\_WROOM-32.bin** file (all files are located in .bin directory) at **0x0**, make sure, that **DoNotChgBin** is select and select COM port, where your board is connected, then click on **START**

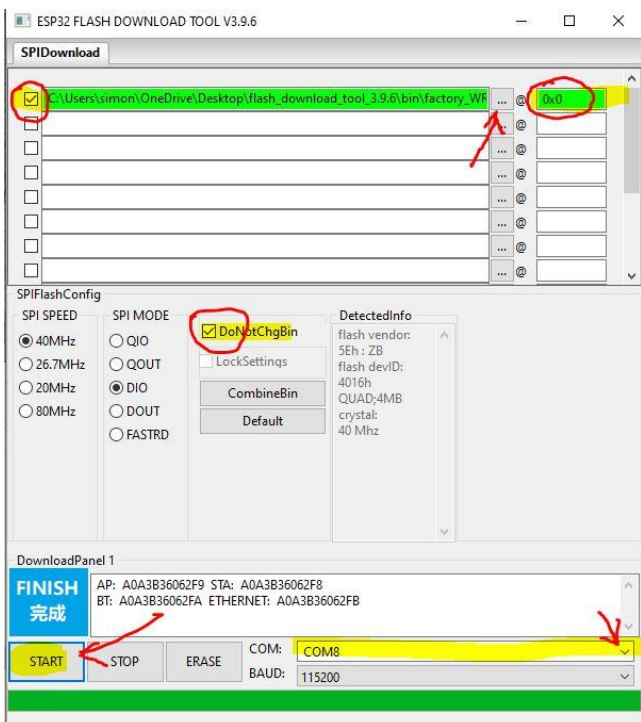

Now you have valid FW for WiFi connection. But this is not end yet!  
Download free version of Arduino IDE and upload our free version of mag-board (located in mag-board\_user directory)

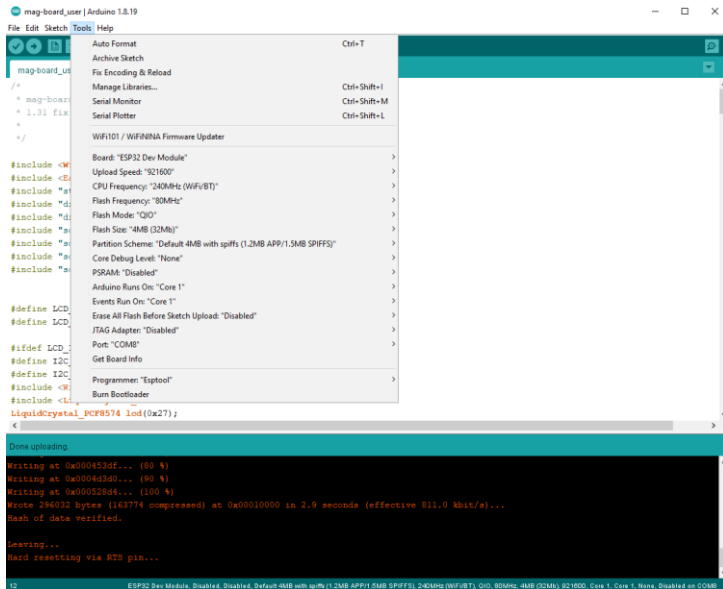

After this use flash\_download\_tool again and this time **unselect** factory\_WROOM and open and select **mag\_board\_v1.32.bin** at **0x10000** and click on **START** again.

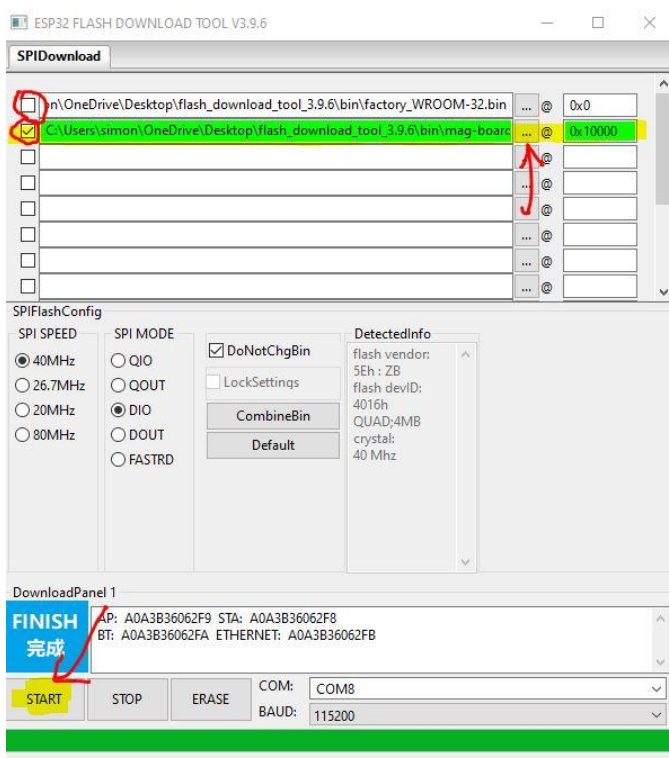

This is all